SynCon TRKS 10, TRKSD 10 and TRKS 10/3 Page 1 SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



SynCon TRKS 10, TRKSD 10 and TRKS 10/3

Attributes

This type family has been developed for direct assembly on the coil body with integrated installation chambers. All terminals can also be snapped onto aluminium transformer rails 2×10 mm and 2×35 mm in size.

The type series includes:

- Single, double and triple terminals with screw connections
- Single and double terminals with combined screw/push-on blade connections
- Green/yellow PE terminals for screw connecting and welding to the core stack
- Fuse terminals for the relevant 5 x 20 mm, 5 x 30 mm and 6.3 x 32 mm cartridge fuse links
- Single, double and triple terminals with a connection capacity of 10 mm²

Delivery forms

50 pieces per package








SynCon TRKS 10, TRKSD 10 and TRKS 10/3 Page 2

SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



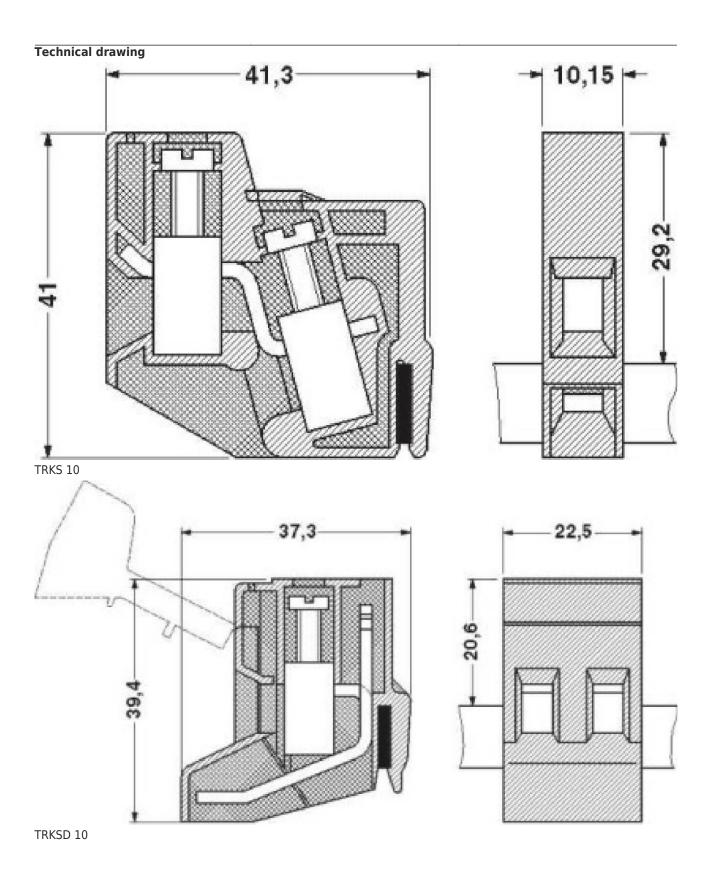









Product datasheet

SynCon TRKS 10, TRKSD 10 and TRKS 10/3 Page 3 $\,$

SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



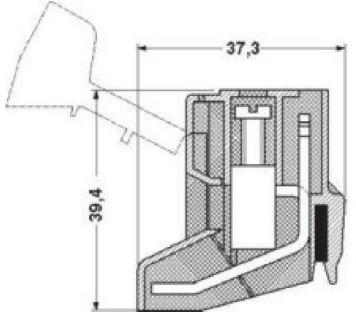

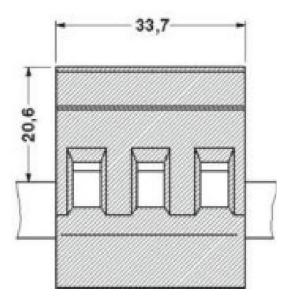

TRKS 10/3







Page 4

SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



Technical data	Unit of measure	TRKS 10	TRKSD 10
Design		single terminal	double terminal
Rated cross section	mm²	10	10
Rated voltage	V	only possible with transformer	only possible with transformer
Rated insulation voltage	V	690	690
Rated surge voltage / Contamination class	kV / -	8 / 3	8 / 3
Surge voltage category/Insulation material group		III / I	III / I

Nominal data acc. to CSA	Unit of measure	TRKS 10	TRKSD 10
Rated voltage	V	600	300
Nominal current	А	40	65

Nominal data acc. to UL	Unit of measure	TRKS 10	TRKSD 10
Rated voltage	V	300	300
Nominal current	А	65	65







SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



Connection data	Unit of measure	TRKS 10	TRKSD 10
Strand cross section rigid min	mm²	0.5	0.5
Strand cross section rigid max	mm²	16	16
Strand cross section flexible min	mm²	0.5	0.5
Strand cross section flexible max	mm²	10	10
Strand cross section with AEH min	mm²	0.5	0.5
Strand cross section with AEH max	mm²	4	4
2 strands equal cross section rigid min	mm²	0.5	0.5
2 strands equal cross section rigid max	mm²	4	4
2 strands equal cross section flexible min	mm²	0.5	0.5
2 strands equal cross section flexible max	mm²	6	6
2 strands equal cross section with TWIN-AEH min	mm²	0.5	0.5
2 strands equal cross section with TWIN-AEH max	mm²	10	6
Number of connections		2	4
Connection type		screw connection	screw connection
Stripping length	mm	14	14
Thread		M4	M4







Product datasheet

SynCon TRKS 10, TRKSD 10 and TRKS 10/3 Page 6 SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



Connection data	Unit of measure	TRKS 10	TRKSD 10
Torque	Nm	1.5-1.8	1.5-1.8

Material data	TRKS 10	TRKSD 10
Insulation material	PA	PA
Inflammability class acc. to UL 94	V2	V2
Contact surface	tin-plated	tin-plated

Description	TRKS 10
Colour	grey, orange

Description	TRKSD 10	TRKSD 10/3
Colour	grey, orange	grey, orange

Technical data	Unit of measure	TRKSD 10/3
Design		triple terminal
Rated cross section	mm²	10







SynCon TRKS 10, TRKSD 10 and TRKS 10/3 Page 7

SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



Technical data	Unit of measure	TRKSD 10/3
Rated voltage	V	only possible with transformer
Rated insulation voltage	V	690
Rated surge voltage / Contamination class	kV / -	8/3
Surge voltage category/Insulation material group		III / I

Nominal data acc. to CSA	Unit of measure	TRKSD 10/3
Rated voltage	V	300
Nominal current	А	65

Nominal data acc. to UL	Unit of measure	TRKSD 10/3
Rated voltage	V	300
Nominal current	А	65

Connection data	Unit of measure	TRKSD 10/3
Strand cross section rigid min	mm²	0.5
Strand cross section rigid max	mm²	16







SynCon TRKS 10, TRKSD 10 and TRKS 10/3 Page 8

SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



Connection data	Unit of measure	TRKSD 10/3
Strand cross section flexible min	mm²	0.5
Strand cross section flexible max	mm²	10
Strand cross section with AEH min	mm²	0.5
Strand cross section with AEH max	mm²	4
2 strands equal cross section rigid min	mm²	0.5
2 strands equal cross section rigid max	mm²	4
2 strands equal cross section flexible min	mm²	0.5
2 strands equal cross section flexible max	mm²	6
2 strands equal cross section with TWIN-AEH min	mm²	0.5
2 strands equal cross section with TWIN-AEH max	mm²	6
Number of connections		6
Connection type		screw connection
Stripping length	mm	14
Thread		M4
Torque	Nm	1.5-1.8

Material data	TRKSD 10/3
Insulation material	PA
Inflammability class acc. to UL 94	V2







Product datasheet

SynCon TRKS 10, TRKSD 10 and TRKS 10/3 Page 9 $\,$

SynFlex Elektro GmbH Auf den Kreuzen 24 D-32825 Blomberg Germany Telefon +49-5235-968-0 E-Mail info@synflex.de



Material data	TRKSD 10/3
Contact surface	tin-plated

