

Product datasheet

SynCon® TRKS 4-PE and TRK 4S-FS GN/YE
Page 1

SynFlex Elektro GmbH
Auf den Kreuzen 24
D-32825 Blomberg Germany
Telefon +49-5235-968-0
E-Mail info@synflex.de



SynCon® TRKS 4-PE and TRK 4S-FS GN/YE

Attributes

This range was developed for direct mounting on bobbins with integrated mounting compartments. However, all terminals can also be snap mounted on 2 x 10 mm and 2 x 35 mm aluminium transformer rails.

The range encompasses:

Green/yellow ground terminal blocks for screw fitting and welding to laminated core

Delivery forms


50 units per package

The information on this data sheet is based on the information provided by our supplier. It does not represent any specification or agreements regarding conditions or properties. The indicated values are standard values. Deviations from those values due to production and application cannot be excluded. The information on this data sheet is addressed to experts who use it at their own discretion and at their own risk. We do not guarantee results, or accept liability for the indicated specifications or for results obtained based on the specifications. Please contact us for more detailed information. Non-toxic and toxic substances are listed on the safety data sheet.

Updated 06/24



Technical drawing

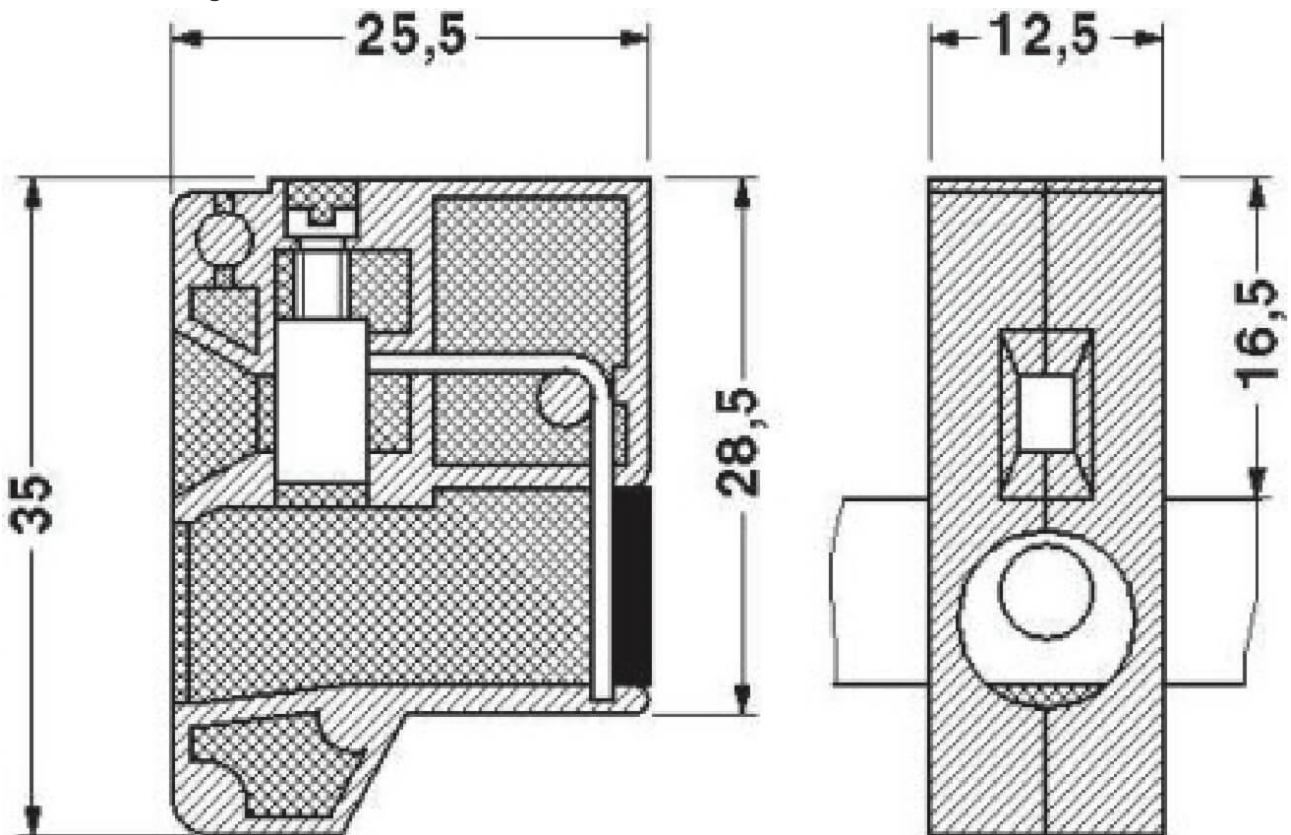

TRKS 4-PE

The information on this data sheet is based on the information provided by our supplier. It does not represent any specification or agreements regarding conditions or properties. The indicated values are standard values. Deviations from those values due to production and application cannot be excluded. The information on this data sheet is addressed to experts who use it at their own discretion and at their own risk. We do not guarantee results, or accept liability for the indicated specifications or for results obtained based on the specifications. Please contact us for more detailed information. Non-toxic and toxic substances are listed on the safety data sheet.

Updated 06/24



Technical data	Unit of measure	TRKS 4-PE	TRKS4-FS GN/YE
Rated cross section	mm ²	4	4
Rated voltage	V		
Rated insulation voltage	V	-	690
Rated surge voltage / Contamination class	kV / -	8 / 3	8 / 3
Surge voltage category/Insulation material group		III / I	III / I

Nominal data acc. to CSA	Unit of measure	TRKS 4-PE	TRKS4-FS GN/YE
Rated voltage	V	-	600
Nominal current	A	-	27

Nominal data acc. to UL	Unit of measure	TRKS 4-PE	TRKS4-FS GN/YE
Rated voltage	V	600	600
Nominal current	A	30	30

Connection data	Unit of measure	TRKS 4-PE	TRKS4-FS GN/YE
-----------------	-----------------	-----------	----------------

The information on this data sheet is based on the information provided by our supplier. It does not represent any specification or agreements regarding conditions or properties. The indicated values are standard values. Deviations from those values due to production and application cannot be excluded. The information on this data sheet is addressed to experts who use it at their own discretion and at their own risk. We do not guarantee results, or accept liability for the indicated specifications or for results obtained based on the specifications. Please contact us for more detailed information. Non-toxic and toxic substances are listed on the safety data sheet.

Updated 06/24



Product datasheetSynCon® TRKS 4-PE and TRK 4S-FS GN/YE
Page 4SynFlex Elektro GmbH
Auf den Kreuzen 24
D-32825 Blomberg Germany
Telefon +49-5235-968-0
E-Mail info@synflex.de

Connection data	Unit of measure	TRKS 4-PE	TRKS4-FS GN/YE
Strand cross section rigid min	mm ²	0.2	0.2
Strand cross section rigid max	mm ²	6	6
Strand cross section flexible min	mm ²	0.2	0.2
Strand cross section flexible max	mm ²	4	4
Strand cross section with AEH min	mm ²	0.25	0.25
Strand cross section with AEH max	mm ²	1.5	1.5
2 strands equal cross section rigid min	mm ²	0.2	0.2
2 strands equal cross section rigid max	mm ²	1.5	1.5
2 strands equal cross section flexible min	mm ²	0.2	0.2
2 strands equal cross section flexible max	mm ²	1.5	1.5
2 strands equal cross section with TWIN-AEH min	mm ²	0.5	0.5
2 strands equal cross section with TWIN-AEH max	mm ²	2.5	2.5
Number of connections		2	2
Connection type		screw connection	screw connection
Stripping length	mm	8	8
Thread		M3	M3
Torque	Nm	0.6-0.8	0.6-0.8

The information on this data sheet is based on the information provided by our supplier. It does not represent any specification or agreements regarding conditions or properties. The indicated values are standard values. Deviations from those values due to production and application cannot be excluded. The information on this data sheet is addressed to experts who use it at their own discretion and at their own risk. We do not guarantee results, or accept liability for the indicated specifications or for results obtained based on the specifications. Please contact us for more detailed information. Non-toxic and toxic substances are listed on the safety data sheet.

Updated 06/24



Product datasheetSynCon® TRKS 4-PE and TRK 4S-FS GN/YE
Page 5SynFlex Elektro GmbH
Auf den Kreuzen 24
D-32825 Blomberg Germany
Telefon +49-5235-968-0
E-Mail info@synflex.de

Material data	TRKS 4-PE	TRKS4-FS GN/YE
Insulation material	PA	PA
Inflammability class acc. to UL 94	V2	V2
Contact surface	tin-plated	tin-plated

Description	TRKS 4-PE
Colour	green-yellow

Description	TRKS4-FS GN/YE
Colour	green-yellow

The information on this data sheet is based on the information provided by our supplier. It does not represent any specification or agreements regarding conditions or properties. The indicated values are standard values. Deviations from those values due to production and application cannot be excluded. The information on this data sheet is addressed to experts who use it at their own discretion and at their own risk. We do not guarantee results, or accept liability for the indicated specifications or for results obtained based on the specifications. Please contact us for more detailed information. Non-toxic and toxic substances are listed on the safety data sheet.

Updated 06/24

